

**LSA 44.3**

**Low Voltage Alternator - 4 pole**

70 to 200 kVA - 50 Hz / 88 to 250 kVA - 60 Hz  
Electrical and mechanical data

**LEROY-SOMER™**

***Nidec***  
All for dreams

### Specially adapted to applications

The LSA 44.3 alternator is designed to be suitable for typical generator applications, such as: backup, prime power, cogeneration, marine applications, rental, telecommunications, etc.

### Compliant with international standards

The LSA 44.3 alternator conforms to the main international standards and regulations:

IEC 60034, NEMA MG 1.32-33, ISO 8528-3, CSA C22.2 n°100-14, UL 1446 (UL 1004 on request), marine regulations, etc.

It can be integrated into a EC marked generator.

The LSA 44.3 is designed, manufactured and marketed in an ISO 9001 environment and ISO 14001.

### Top of the range electrical performance

- Class H insulation
- Standard 12 wire re-connectable winding, 2/3 pitch, type no. 6
- Voltage range:
  - 50 Hz: 220 V - 240 V and 380 V - 415 V (440 V)
  - 60 Hz: 208 V - 240 V and 380 V - 480 V
- High efficiency and motor starting capacity
- Other voltages are possible with optional adapted windings:
  - 50 Hz: 440 V (no. 7), 500 V (no. 9), 690 V (n°10 or 52)
  - 60 Hz: 380 V and 416 V (no. 8), 600 V (no. 9)
- R 791 interference suppression conforming to standard EN 61000-6-3, EN 61000-6-2, EN 55011 group 1 class B standard for European zone (EC marking)

### Reinforced mechanical structure using finite element modelling

- Compact rigid assembly to better withstand generator vibrations
- Steel frame and terminal box
- Aluminium flanges and shields
- Two-bearing and single-bearing versions designed to be suitable for commercially-available heat engines
- Half-key balancing two bearing
- Permanently greased bearings (20 000h)
- Direction of rotation: clockwise and anti-clockwise (without derating)

### Excitation and regulation system suited to the application

Excitation system				Regulation options			
Voltage regulator	SHUNT	AREP (option)	PMG (option)	C.T. Current transformer for paralleling	Mains paralleling	3-phase sensing	Remote voltage potentiometer
R250	Standard	-	-	-	-	-	√
D350	-	Standard	Standard	C.T.	-	√	√
D550	Option	Option	Option	C.T.	√	√	√


√ : Possible option

### Compact and design terminal box

- Easy access to the AVR (lid) and to the connections
- Terminal block for reconnecting the voltage

### Protection system suited to the environment

- The LSA 44.3 is IP 23
- Standard winding protection for clean environments with relative humidity ≤ 95%, including indoor marine environments
- Options:
  - Filters on air inlet: derating 5%
  - Filters on air inlet and air outlet (IP 44) : derating 10%
  - Space heaters
  - Thermal protection for stator windings
  - Winding protection for harsh environments and relative humidity greater than 95%
  - Shaft height: H = 225 mm on demand
  - Cable outlet at right

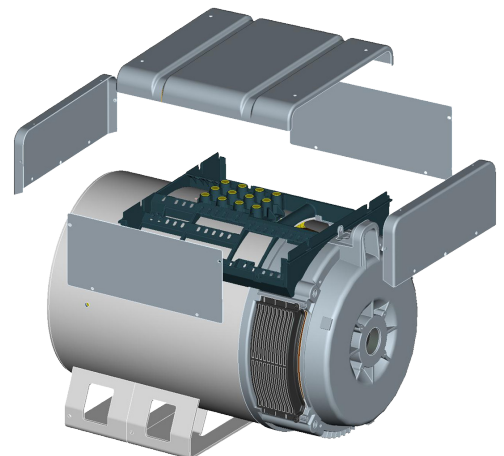

# LSA 44.3 - 70 to 200 kVA - 50 Hz / 88 to 250 kVA - 60 Hz

## General characteristics

Insulation class	H	Excitation system	SHUNT	AREP / PMG
Winding pitch	2/3 (wdg 6)	AVR type	R250	D350
Number of wires	12	Voltage regulation (*)	± 0.5%	± 0.25%
Protection	IP 23	Short-circuit current	-	300% (3 IN): 10 s
Altitude	≤ 1000 m	Total Harmonic Distortion THD (**) in no-load .....	< 2%	
Overspeed	2250 min <sup>-1</sup>	Total Harmonic Distortion THD (**) on linear load ...	< 5%	
Air flow	0.25m <sup>3</sup> /s, 50 Hz - 0.30m <sup>3</sup> /s, 60 Hz	Waveform: NEMA = TIF (**)	< 50	
Air flow (***)	0.29m <sup>3</sup> /s, 50 Hz - 0.34m <sup>3</sup> /s, 60 Hz	(*) Steady state. (**) Total harmonic distortion between phases, no-load or on-load (non-distorting).		

(\*\*\*) Only for LS 44.3 L12, VL13 & VL14

## Ratings 50 Hz - 1500 R.P.M.











kVA / kW * - P.F. = 0.8																					
Duty/T°C	Continuous duty/40°C					Continuous duty/40°C					Stand-by/40°C					Stand-by/27°C					
Class/T°K	H/125°K					F/105°K					H/150°K					H/163°K					
Phase	3 ph.			1 ph.		3 ph.			1 ph.		3 ph.			1 ph.		3 ph.			1 ph.		
<b>Y</b>	380V	400V	415V	440V	Δ	380V	400V	415V	440V	Δ	380V	400V	415V	440V	Δ	380V	400V	415V	440V	Δ	
<b>Δ</b>	220V	230V	240V		230V	220V	230V	240V		230V	220V	230V	240V		230V	220V	230V	240V		230V	
<b>YY</b>					220V					220V					220V					220V	
<b>44.3 S2</b>	kVA	70	<b>70</b>	70	63	42	64	<b>64</b>	64	57	38	74	<b>74</b>	74	67	45	77	<b>77</b>	77	69	46
	kW	56	56	56	50	33.5	51	51	51	46	30.5	59	59	59	54	36	62	62	62	55	37
<b>44.3 S3</b>	kVA	80	<b>80</b>	80	72	48	73	<b>73</b>	73	66	44	85	<b>85</b>	85	76	51	88	<b>88</b>	88	79	53
	kW	64	64	64	58	38.5	58	58	58	53	35	68	68	68	61	41	70	70	70	63	42
<b>44.3 S4</b>	kVA	90	<b>90</b>	90	81	54	82	<b>82</b>	82	74	49	95	<b>95</b>	95	86	57	100	<b>100</b>	100	89	59
	kW	72	72	72	65	43	66	66	66	59	39	76	76	76	69	46	80	80	80	71	47
<b>44.3 S5</b>	kVA	100	<b>100</b>	100	90	60	91	<b>91</b>	91	82	55	106	<b>106</b>	106	95	64	110	<b>110</b>	110	99	66
	kW	80	80	80	72	48	73	73	73	66	44	85	85	85	76	51	88	88	88	79	53
<b>44.3 M6</b>	kVA	125	<b>125</b>	125	113	67	114	<b>114</b>	114	103	61	133	<b>133</b>	133	120	71	138	<b>138</b>	138	124	74
	kW	100	100	100	90	54	91	91	91	82	49	106	106	106	96	57	110	110	110	99	59
<b>44.3 M8</b>	kVA	135	<b>135</b>	135	122	73	123	<b>123</b>	123	111	66	143	<b>143</b>	143	129	77	150	<b>150</b>	150	134	80
	kW	108	108	108	98	58	98	98	98	89	53	114	114	114	103	62	120	120	120	107	64
<b>44.3 L10</b>	kVA	150	<b>150</b>	150	135	80	137	<b>137</b>	137	123	73	159	<b>159</b>	159	143	85	165	<b>165</b>	165	149	88
	kW	120	120	120	108	64	110	110	110	98	58	127	127	127	114	68	132	132	132	119	70
<b>44.3 L12</b>	kVA	165	<b>165</b>	165	138	88	150	<b>150</b>	150	126	80	175	<b>175</b>	175	150	93	182	<b>182</b>	182	157	97
	kW	132	132	132	110	70	120	120	120	101	64	140	140	140	120	74	146	146	146	126	78
<b>44.3 VL13</b>	kVA	180	<b>180</b>	180	171	90	164	<b>164</b>	164	156	82	191	<b>191</b>	191	181	95	200	<b>200</b>	200	188	99
	kW	144	144	144	137	72	131	131	131	125	66	153	153	153	145	76	160	160	160	150	79
<b>44.3 VL14</b>	kVA	192	<b>200</b>	200	192	100	175	<b>182</b>	182	175	91	204	<b>212</b>	212	204	106	211	<b>220</b>	220	211	110
	kW	154	160	160	154	80	140	146	146	140	73	163	170	170	163	85	169	176	176	169	88

## Ratings 60 Hz - 1800 R.P.M.











kVA / kW * - P.F. = 0.8																					
Duty/T°C	Continuous duty/40°C					Continuous duty/40°C					Stand-by/40°C					Stand-by/27°C					
Class/T°K	H/125°K					F/105°K					H/150°K					H/163°K					
Phase	3 ph.			1 ph.		3 ph.			1 ph.		3 ph.			1 ph.		3 ph.			1 ph.		
<b>Y</b>	380V	416V	440V	480V	Δ	380V	416V	440V	480V	Δ	380V	416V	440V	480V	Δ	380V	416V	440V	480V	Δ	
<b>Δ</b>	220V	240V		240V	220V	240V		240V	220V	240V		240V	220V	240V		240V	220V	240V		240V	
<b>YY</b>					240V					240V					240V					240V	
<b>44.3 S2</b>	kVA	69	76	80	<b>88</b>	46	63	69	73	<b>80</b>	42	73	81	85	<b>93</b>	49	76	84	88	<b>97</b>	51
	kW	55	61	64	70	37	50	55	58	64	33.5	58	65	68	74	39	61	67	70	78	41
<b>44.3 S3</b>	kVA	79	87	92	<b>100</b>	52	72	79	84	<b>91</b>	47	84	92	98	<b>106</b>	55	87	96	101	<b>110</b>	57
	kW	63	70	74	80	42	58	63	67	73	37.5	67	74	78	85	44	70	77	81	88	46
<b>44.3 S4</b>	kVA	89	98	103	<b>113</b>	59	81	89	94	<b>103</b>	54	94	104	109	<b>120</b>	63	98	108	113	<b>124</b>	65
	kW	71	78	82	90	47	65	71	75	82	43	75	83	87	96	50	78	86	90	99	52
<b>44.3 S5</b>	kVA	99	108	115	<b>125</b>	65	90	98	105	<b>114</b>	59	105	114	122	<b>133</b>	69	109	119	127	<b>138</b>	72
	kW	79	86	92	100	52	72	78	84	91	47	84	91	98	106	55	87	95	102	110	58
<b>44.3 M6</b>	kVA	124	135	143	<b>156</b>	76	113	123	130	<b>142</b>	69	131	143	152	<b>165</b>	81	136	149	157	<b>172</b>	84
	kW	99	108	114	125	61	90	98	104	114	55	105	114	122	132	65	109	119	126	138	67
<b>44.3 M8</b>	kVA	134	146	155	<b>169</b>	81	122	133	141	<b>154</b>	74	142	155	164	<b>179</b>	86	147	161	171	<b>186</b>	89
	kW	107	117	124	135	65	98	106	113	123	59	114	124	131	143	69	118	129	137	149	71
<b>44.3 L10</b>	kVA	148	163	172	<b>188</b>	95	135	148	157	<b>171</b>	86	157	173	182	<b>199</b>	101	163	179	189	<b>207</b>	105
	kW	118	130	138	150	76	108	118	126	137	69	126	138	146	159	81	130	143	151	166	84
<b>44.3 L12</b>	kVA	165	179	189	<b>206</b>	105	150	163	172	<b>187</b>	96	175	190	200	<b>218</b>	111	182	197	208	<b>227</b>	116
	kW	132	143	151	165	84	120	130	138	150	77	140	152	160	174	89	146	158	166	182	93
<b>44.3 VL13</b>	kVA	180	195	210	<b>225</b>	113	164	177	191	<b>205</b>	102	191	207	223	<b>239</b>	119	200	215	231	<b>250</b>	124
	kW	144	156	168	180	90	131	142	153	164	82	153	166	178	191	95	160	172	185	200	99
<b>44.3 VL14</b>	kVA	200	215	230	<b>250</b>	125	182	196	209	<b>228</b>	114	212	228	244	<b>265</b>	133	220	237	253	<b>275</b>	136
	kW	160	172	184	200	100	146	157	167	182	91	170	182	195	212	106	176	190	202	220	109

\* Values are rounded-off and are subject to change without notice by the manufacturer.

Efficiencies 400 V - 50 Hz (— P.F.: 0.8) (----- P.F.: 1)

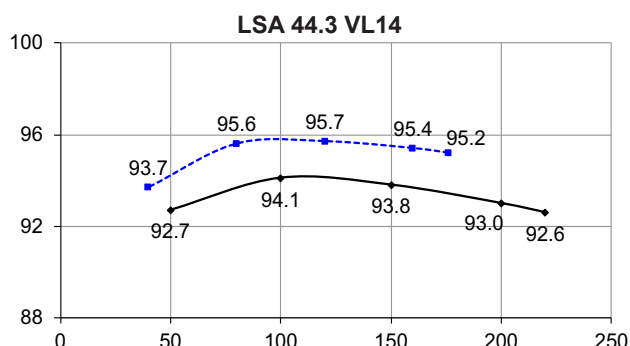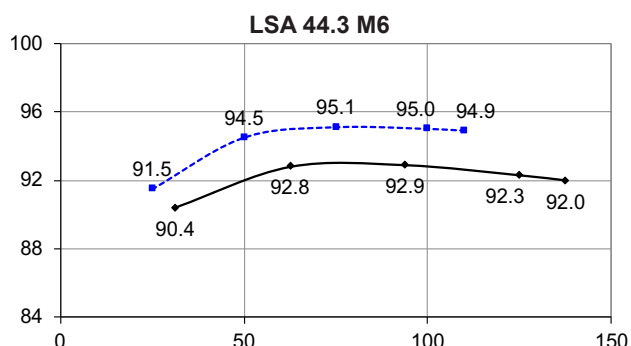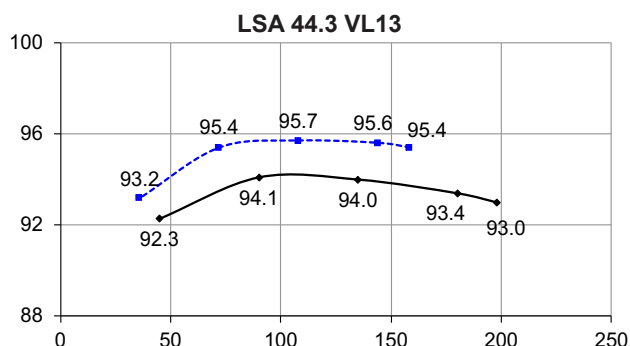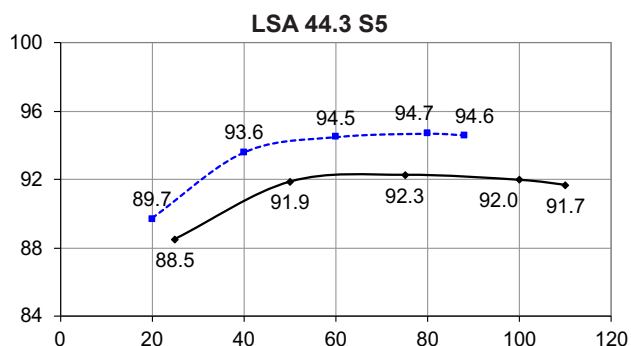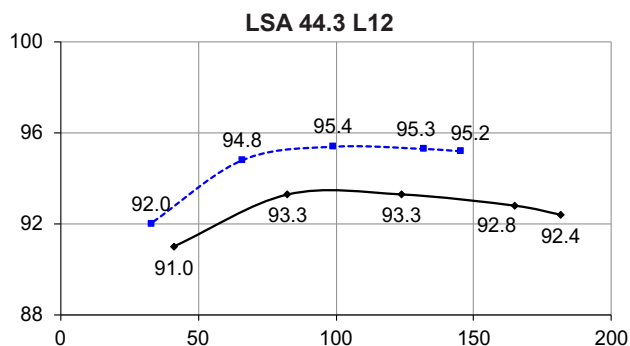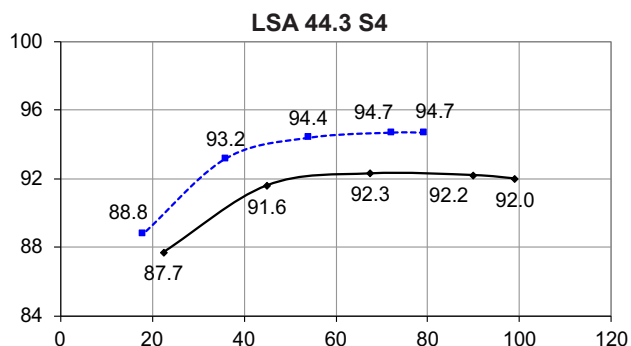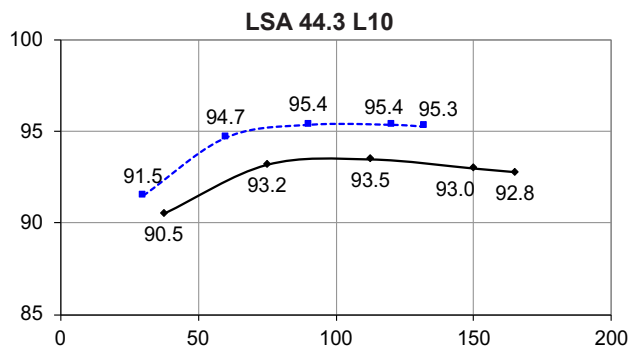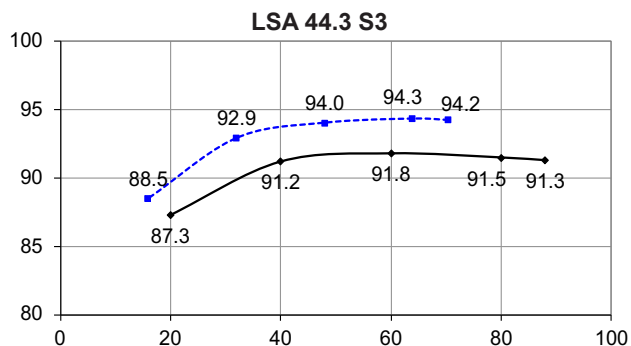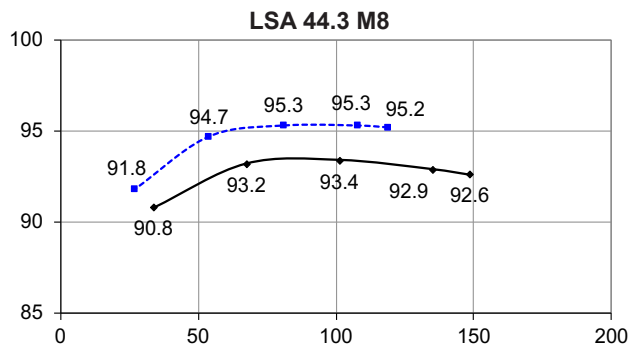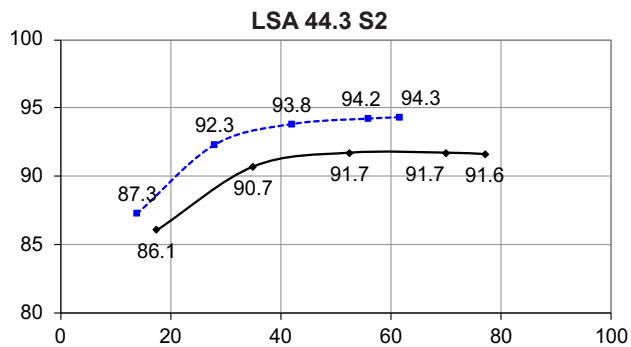

Efficiencies 480 V - 60 Hz (— P.F.: 0.8) (----- P.F.: 1)

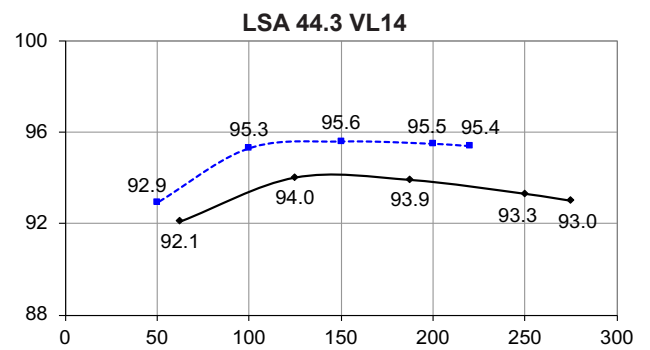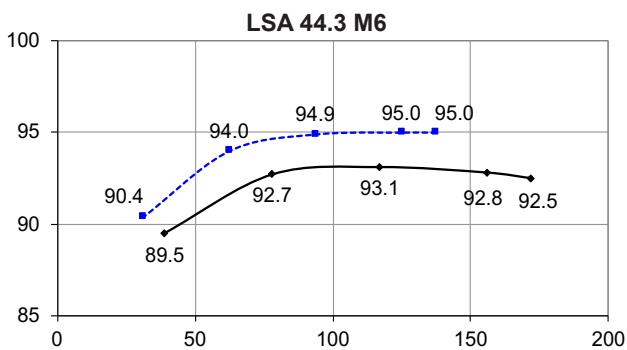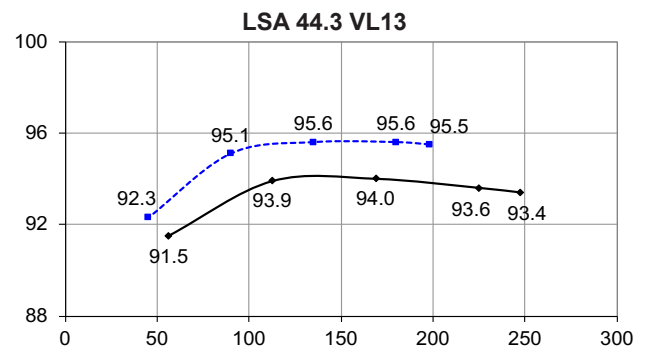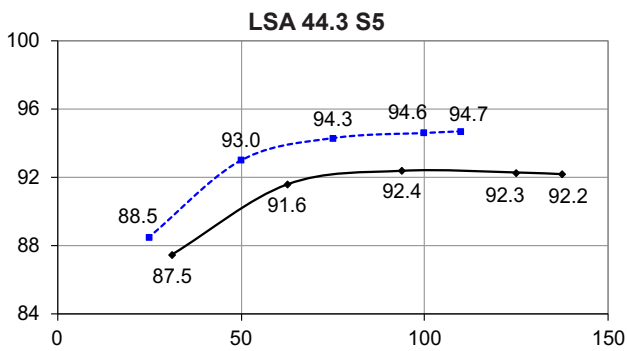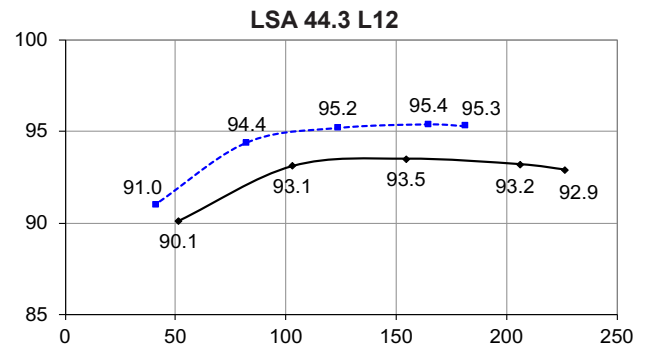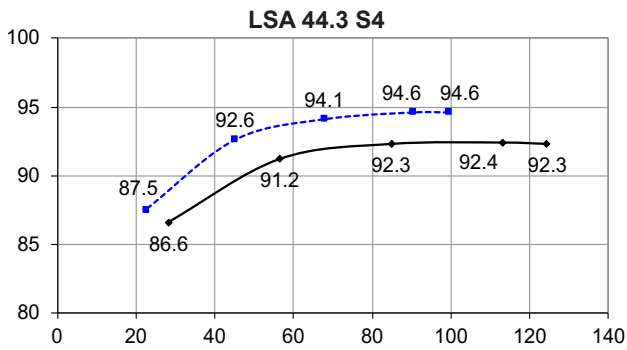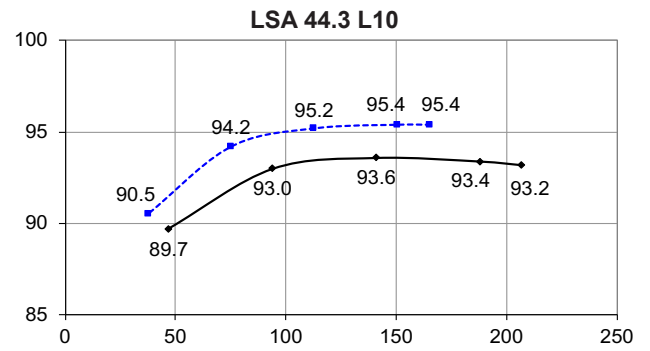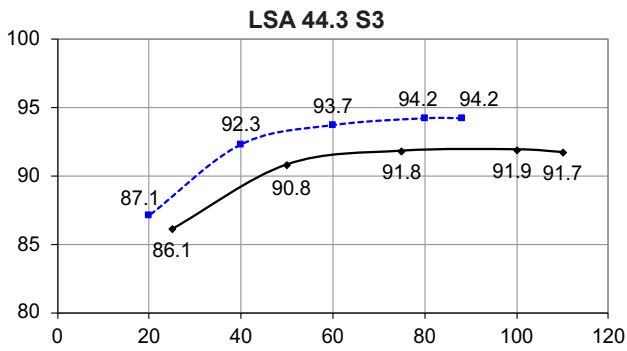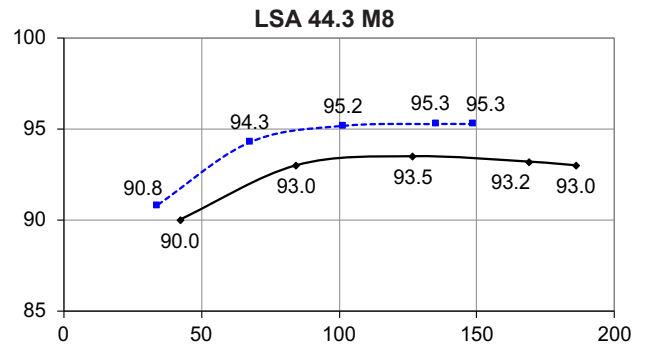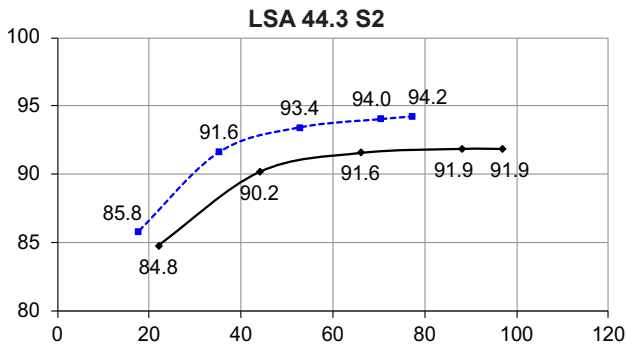

**Reactances (%). Time constants (ms) - Class H / 400 V**

	S2	S3	S4	S5	M6	M8	L10	L12	VL13	VL14
<b>Kcc</b> Short-circuit ratio	0.68	0.59	0.61	0.55	0.45	0.44	0.49	0.44	0.37	0.33
<b>Xd</b> Direct-axis synchro. reactance unsaturated	239	273	258	287	329	323	305	335	343	381
<b>Xq</b> Quadrature-axis synchro. reactance unsaturated	121	139	131	146	167	165	155	171	175	194
<b>T'do</b> No-load transient time constant	2308	2308	2211	2211	2154	2112	2077	2077	2025	2025
<b>X'd</b> Direct-axis transient reactance saturated	10.3	11.8	11.6	12.9	15.2	15.3	14.6	16.1	16.9	18.8
<b>T'd</b> Short-circuit transient time constant	100	100	100	100	100	100	100	100	100	100
<b>X''d</b> Direct-axis subtransient reactance saturated	6.2	7	7	7.7	9.1	9.1	8.8	9.6	10.1	11.3
<b>T''d</b> Subtransient time constant	10	10	10	10	10	10	10	10	10	10
<b>X''q</b> Quadrature-axis subtransient reactance saturated	13.2	15.1	14.5	16.1	18.6	18.3	17.4	19.1	19.7	21.9
<b>Xo</b> Zero sequence reactance	0.43	0.49	0.48	0.54	0.63	0.63	0.61	0.67	0.7	0.78
<b>X2</b> Negative sequence reactance saturated	9.74	11.13	10.75	11.95	13.89	13.78	13.11	14.42	14.96	16.62
<b>Ta</b> Armature time constant	15	15	15	15	15	15	15	15	15	15

**Other class H / 400 V data**

<b>io (A)</b> No-load excitation current SHUNT	0.75	0.75	0.73	0.73	0.66	0.62	0.67	0.67	0.78	0.78
<b>io (A)</b> No-load excitation current AREP	0.97	0.97	0.94	0.94	0.85	0.81	0.86	0.86	0.78	0.78
<b>ic (A)</b> On-load excitation current SHUNT	2.07	2.33	2.11	2.31	2.47	2.37	2.45	2.71	3.17	3.53
<b>ic (A)</b> On-load excitation current AREP	2.67	3	2.71	2.98	3.18	3.05	3.15	3.49	3.17	3.53
<b>uc (V)</b> On-load excitation voltage SHUNT	23.1	25.8	26.5	28.9	30.6	29.3	29.9	32.7	16.2	17.9
<b>uc (V)</b> On-load excitation voltage AREP	18.6	20.7	21.3	23.2	24.5	23.5	24	26.3	16.2	17.9
<b>ms</b> Response time ( $\Delta U = 20\%$ transient)	500	500	500	500	500	500	500	500	500	500
<b>kVA</b> Start ( $\Delta U = 20\%$ cont. or $\Delta U = 30\%$ trans.) SHUNT*	184	184	292	293	310	334	371	379	487	487
<b>kVA</b> Start ( $\Delta U = 20\%$ cont. or $\Delta U = 30\%$ trans.) AREP*	222	221	344	344	366	400	414	414	545	545
<b>%</b> Transient $\Delta U$ (on-load 4/4) SHUNT - P.F.: 0.8 <sub>LAG</sub>	13.3	14.5	11.6	12.4	13.8	13.8	13.4	14.3	13	13.9
<b>%</b> Transient $\Delta U$ (on-load 4/4) AREP - P.F.: 0.8 <sub>LAG</sub>	11.8	12.9	10.4	11.1	12.3	12.3	12	12.7	11.6	12.4
<b>W</b> No-load losses	2174	2174	2396	2396	2387	2478	2894	2946	2670	2670
<b>W</b> Heat dissipation	5025	5892	6073	6935	8254	8251	8914	10236	10165	11933

\* P.F. = 0.6

**Reactances (%). Time constants (ms) - Class H / 480 V**

	S2	S3	S4	S5	M6	M8	L10	L12	VL13	VL14
<b>Kcc</b> Short-circuit ratio	0.65	0.57	0.58	0.53	0.43	0.42	0.47	0.43	0.36	0.32
<b>Xd</b> Direct-axis synchro. reactance unsaturated	250	284	270	299	342	337	318	349	358	397
<b>Xq</b> Quadrature-axis synchro. reactance unsaturated	127	145	137	152	174	172	162	178	182	202
<b>T'do</b> No-load transient time constant	2308	2308	2211	2211	2154	2112	2077	2077	2025	2025
<b>X'd</b> Direct-axis transient reactance saturated	10.8	12.3	12.2	13.5	15.8	15.9	15.3	16.8	17.6	19.6
<b>T'd</b> Short-circuit transient time constant	100	100	100	100	100	100	100	100	100	100
<b>X''d</b> Direct-axis subtransient reactance saturated	6.5	7.3	7.3	8.1	9.5	9.5	9.2	10	10.6	11.7
<b>T''d</b> Subtransient time constant	10	10	10	10	10	10	10	10	10	10
<b>X''q</b> Quadrature-axis subtransient reactance saturated	13.9	15.7	15.1	16.7	19.3	19.1	18.1	19.9	20.5	22.8
<b>Xo</b> Zero sequence reactance	0.45	0.51	0.5	0.56	0.66	0.66	0.63	0.7	0.73	0.81
<b>X2</b> Negative sequence reactance saturated	10.2	11.59	11.25	12.44	14.44	14.37	13.7	15	15.59	17.32
<b>Ta</b> Armature time constant	15	15	15	15	15	15	15	15	15	15







**Other class H / 480 V data**

<b>io (A)</b> No-load excitation current SHUNT	0.75	0.75	0.73	0.73	0.66	0.62	0.67	0.67	0.77	0.77
<b>io (A)</b> No-load excitation current AREP	0.97	0.97	0.94	0.94	0.85	0.81	0.86	0.86	0.77	0.77
<b>ic (A)</b> On-load excitation current SHUNT	2.08	2.31	2.13	2.32	2.47	2.38	2.44	2.68	3.21	3.56
<b>ic (A)</b> On-load excitation current AREP	2.67	2.98	2.75	2.99	3.18	3.06	3.14	3.45	3.21	3.56
<b>uc (V)</b> On-load excitation voltage SHUNT	23.5	26	27	29.4	31	29.7	30.3	33	16.6	18.3
<b>uc (V)</b> On-load excitation voltage AREP	18.8	20.8	21.7	23.6	24.9	23.9	24.3	26.5	16.6	18.3
<b>ms</b> Response time ( $\Delta U = 20\%$ transient)	500	500	500	500	500	500	500	500	500	500
<b>kVA</b> Start ( $\Delta U = 20\%$ cont. or $\Delta U = 30\%$ trans.) SHUNT*	220	222	352	351	374	403	465	466	589	587
<b>kVA</b> Start ( $\Delta U = 20\%$ cont. or $\Delta U = 30\%$ trans.) AREP*	265	265	422	423	446	481	541	544	708	706
<b>%</b> Transient $\Delta U$ (on-load 4/4) SHUNT - P.F.: 0.8 <sub>LAG</sub>	13.7	14.9	12	12.7	14.1	14.2	13.8	14.7	13.3	14.3
<b>%</b> Transient $\Delta U$ (on-load 4/4) AREP - P.F.: 0.8 <sub>LAG</sub>	12.2	13.2	10.7	11.4	12.6	12.6	12.3	13	11.9	12.7
<b>W</b> No-load losses	3188	3188	3501	3501	3506	3639	4217	4308	3928	3928
<b>W</b> Heat dissipation	6152	7047	7349	8241	9669	9747	10581	11988	12155	14140

\* P.F. = 0.6









Transient voltage variation 400V - 50 Hz

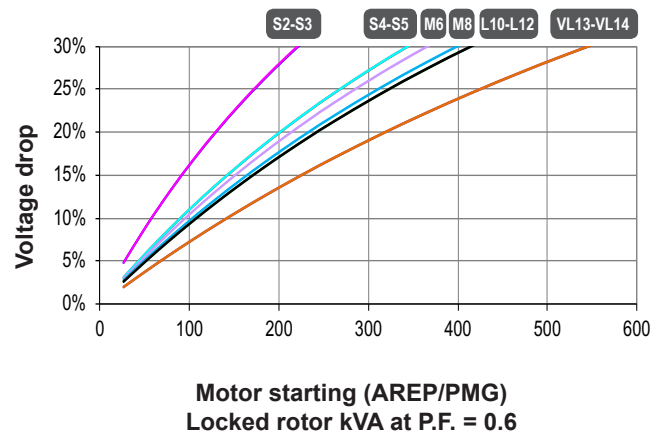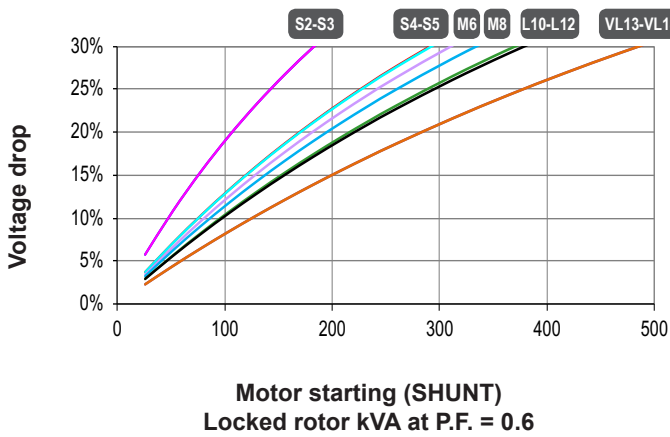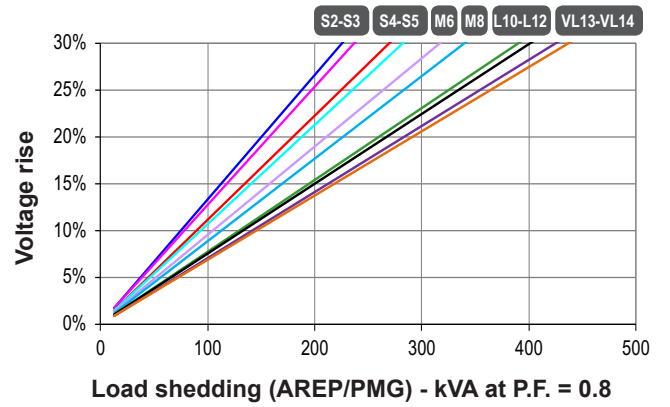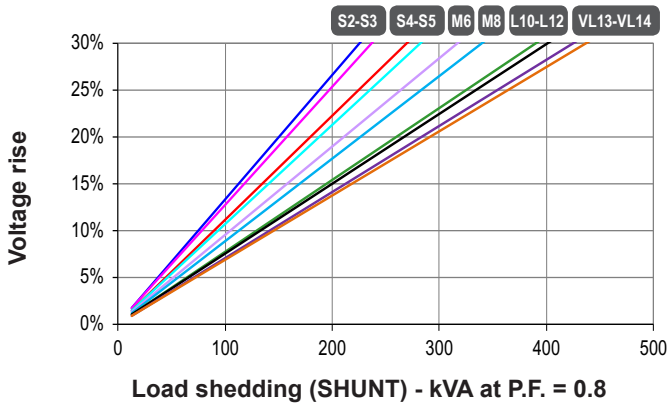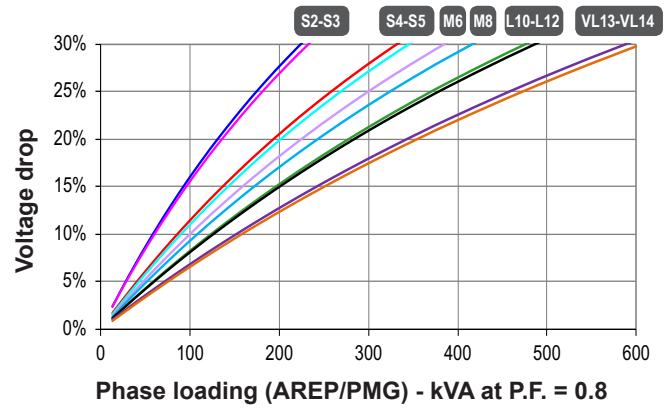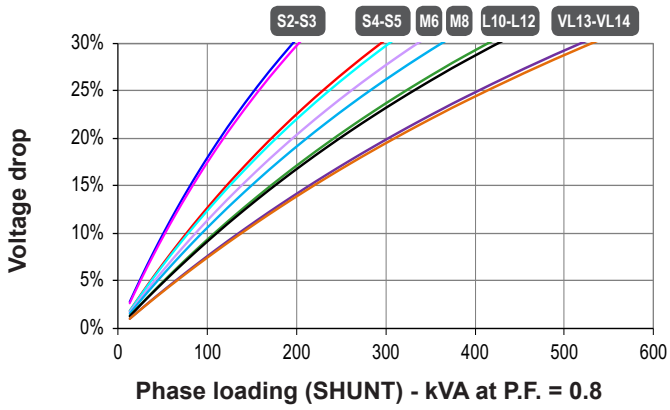

1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by  $K = \text{Sine P.F.} / 0.8$   
 2) For voltages other than 400V (Y), 230V ( $\Delta$ ) at 50 Hz, then kVA must be multiplied by  $(400/U)^2$  or  $(230/U)^2$ .



Transient voltage variation 480V - 60 Hz

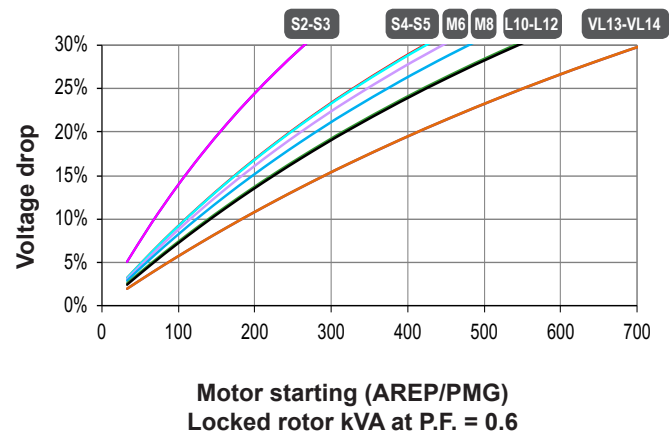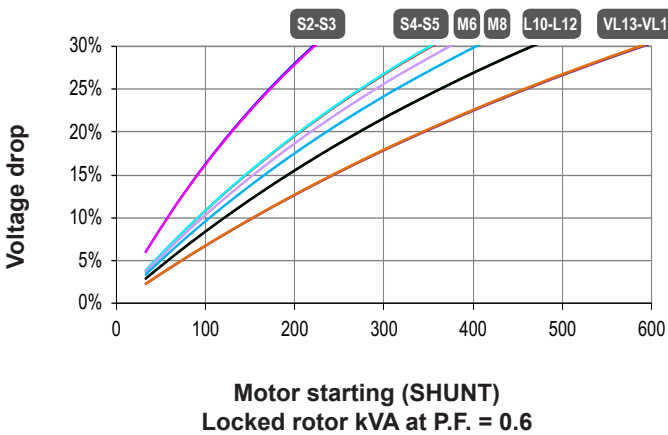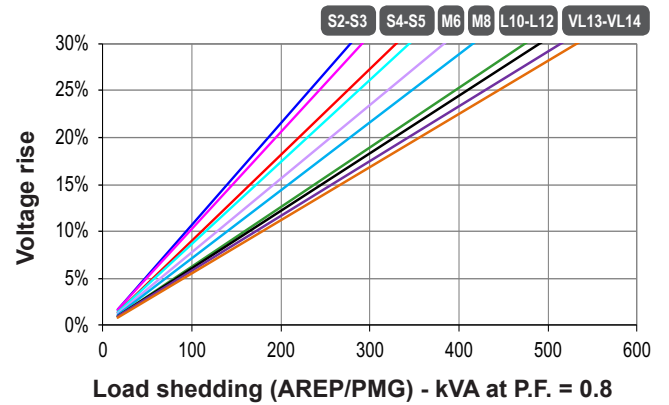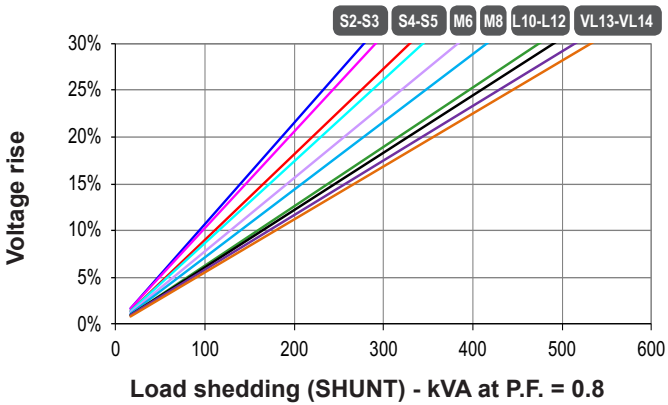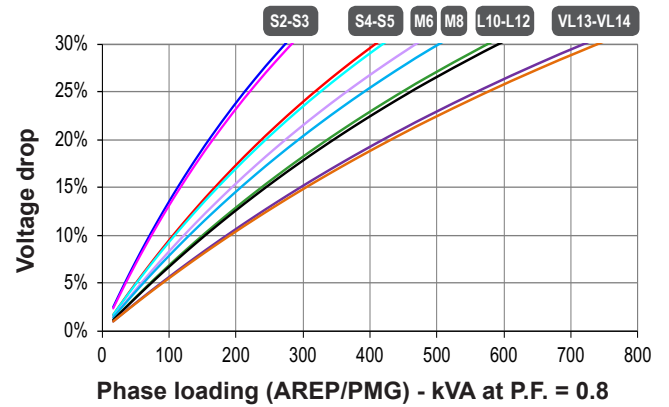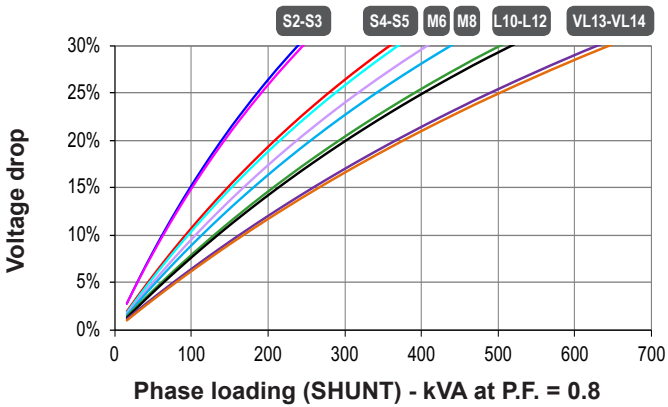


1) For a starting P.F. other than 0.6, the starting kVA must be multiplied by  $K = \text{Sine P.F.} / 0.6$   
 2) For voltages other than 480V (Y), 277V ( $\Delta$ ), 240V (YY) at 60 Hz, then kVA must be multiplied by  $(480/U)^2$  or  $(277/U)^2$  or  $(240/U)^2$ .

3-phase short-circuit curves at no load and rated speed (star connection Y)


**LSA 44.3 S2**

Symmetrical —  
Asymmetrical - - -

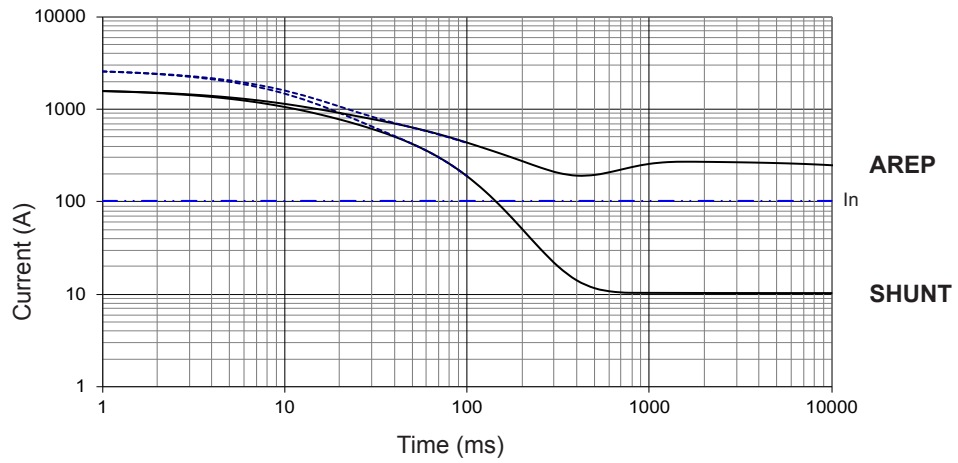


**LSA 44.3 S3**

Symmetrical —  
Asymmetrical - - -

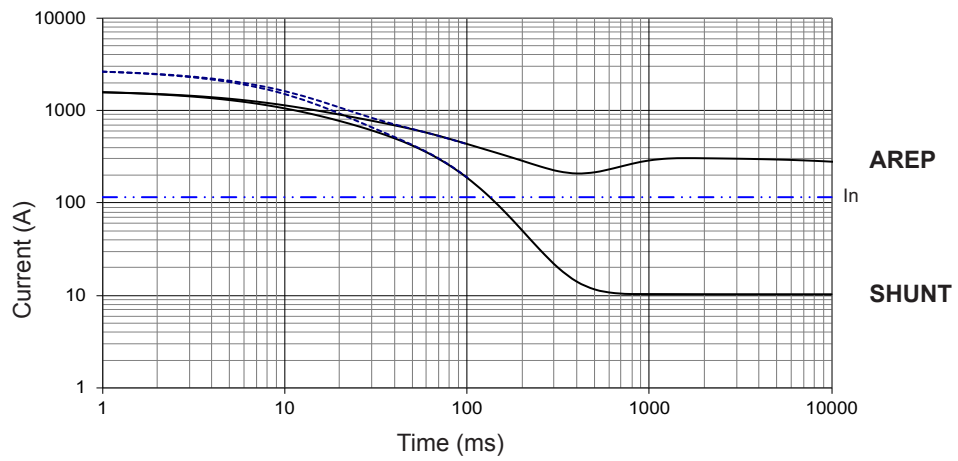

**LSA 44.3 S4**

Symmetrical —  
Asymmetrical - - -

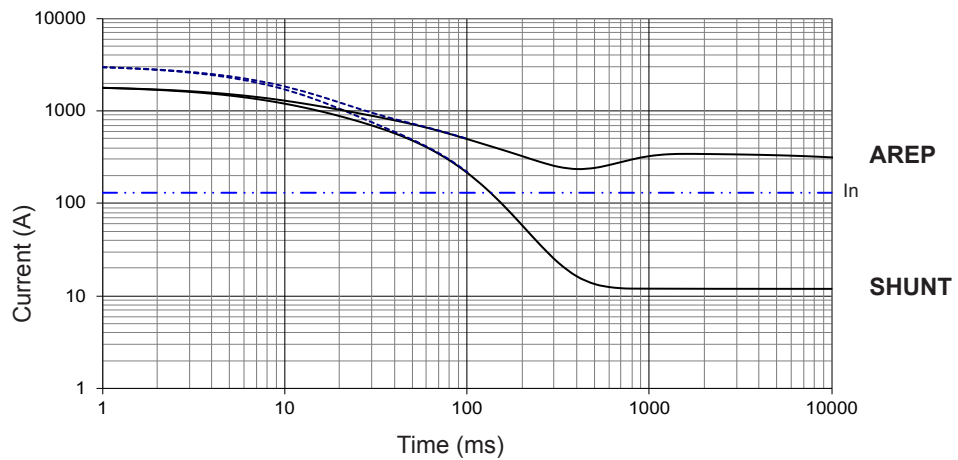

**Influence due to connection**

Curves shown are for star (Y) connection.


For other connections, use the following multiplication factors:

- Series delta : current value x 1.732
- Parallel star : current value x 2

3-phase short-circuit curves at no load and rated speed (star connection Y)


LSA 44.3 S5

Symmetrical —  
Asymmetrical - - -

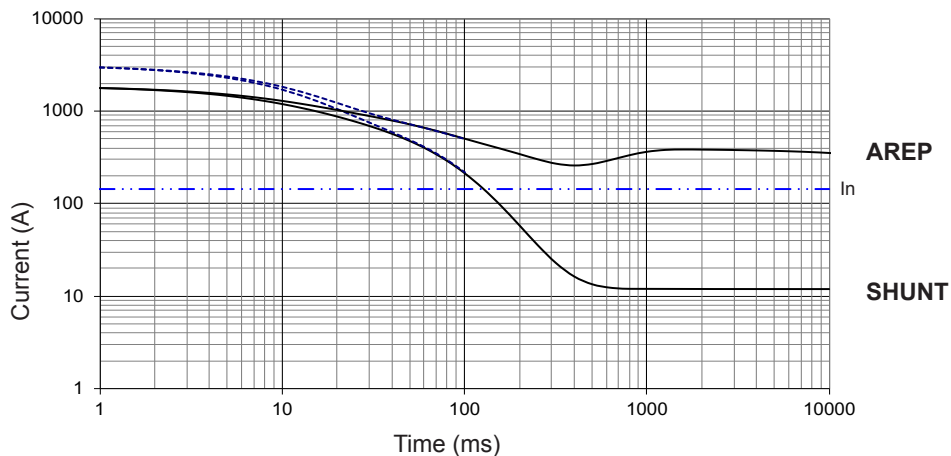


LSA 44.3 M6

Symmetrical —  
Asymmetrical - - -

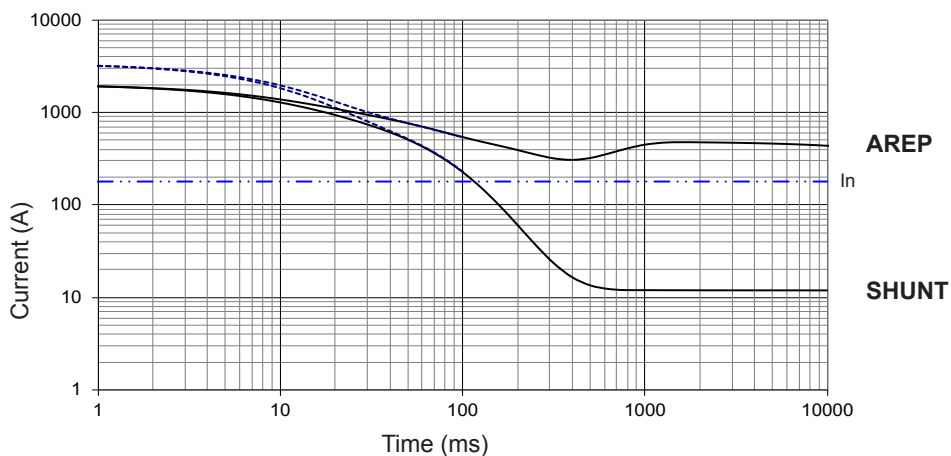

LSA 44.3 M8

Symmetrical —  
Asymmetrical - - -

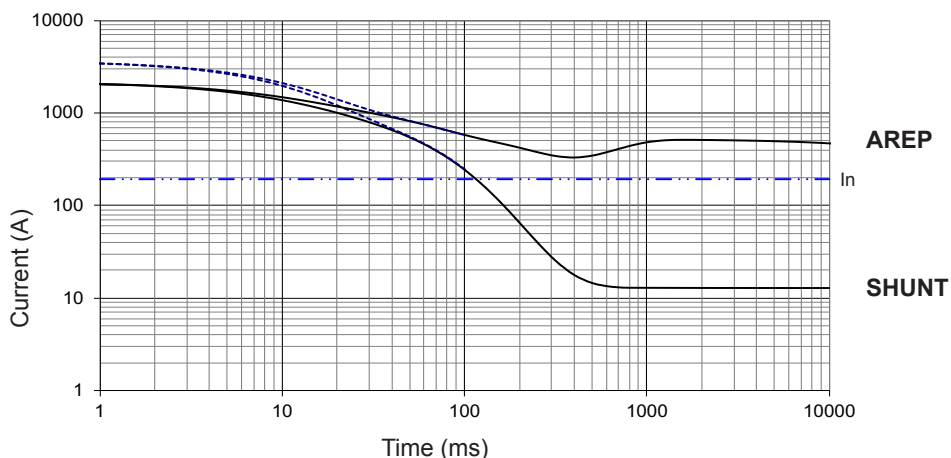

**Influence due to short-circuit**

Curves are based on a three-phase short-circuit.


For other types of short-circuit, use the following multiplication factors.

	3-phase	2-phase L/L	1-phase L/N
Instantaneous (max.)	1	0.87	1.3
Continuous	1	1.5	2.2
Maximum duration (AREP/PMG)	10 sec.	5 sec.	2 sec.

3-phase short-circuit curves at no load and rated speed (star connection Y)


LSA 44.3 L10

Symmetrical —  
Asymmetrical - - -

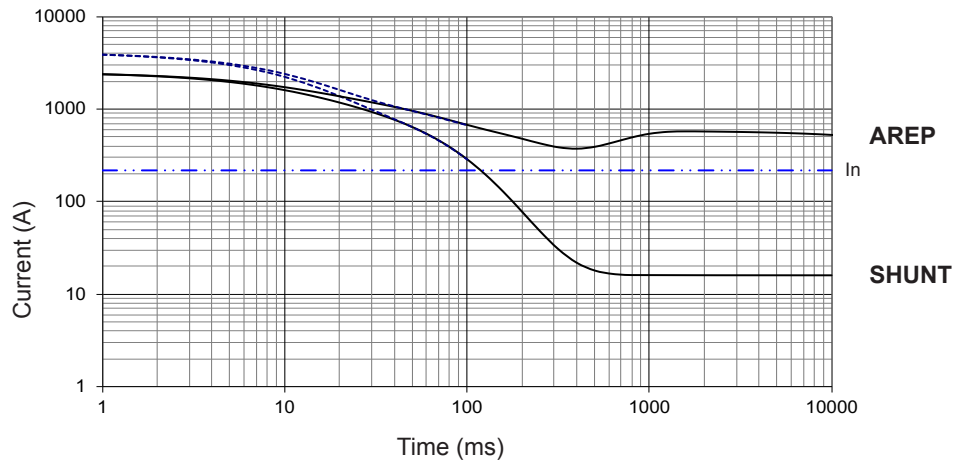

LSA 44.3 L12

Symmetrical —  
Asymmetrical - - -

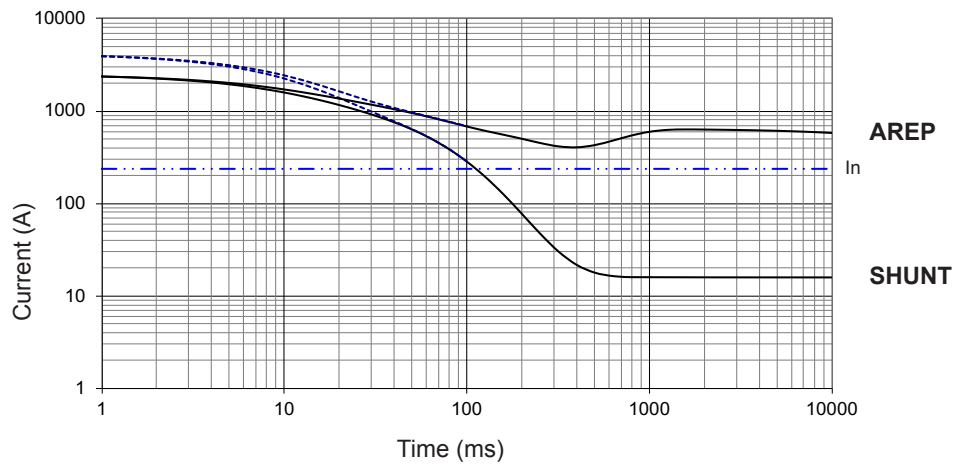

Influence due to connection

Curves shown are for star (Y) connection.


For other connections, use the following multiplication factors:

- Series delta : current value x 1.732 - Parallel star : current value x 2

3-phase short-circuit curves at no load and rated speed (star connection Y)


LSA 44.3 VL13

Symmetrical —  
Asymmetrical - - -

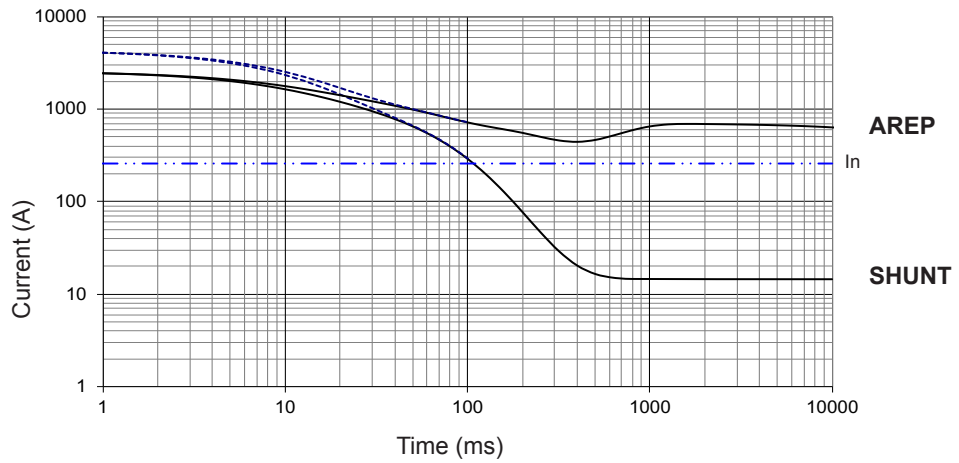

LSA 44.3 VL14

Symmetrical —  
Asymmetrical - - -

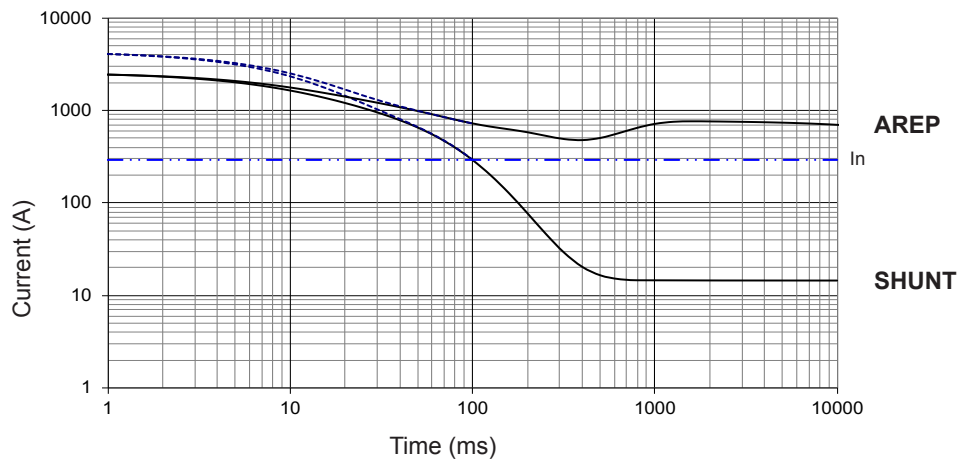


**Influence due to short-circuit**

Curves are based on a three-phase short-circuit.

For other types of short-circuit, use the following multiplication factors.

	3-phase	2-phase L/L	1-phase L/N
Instantaneous (max.)	1	0.87	1.3
Continuous	1	1.5	2.2
Maximum duration (AREP/PMG)	10 sec.	5 sec.	2 sec.

Single bearing dimensions

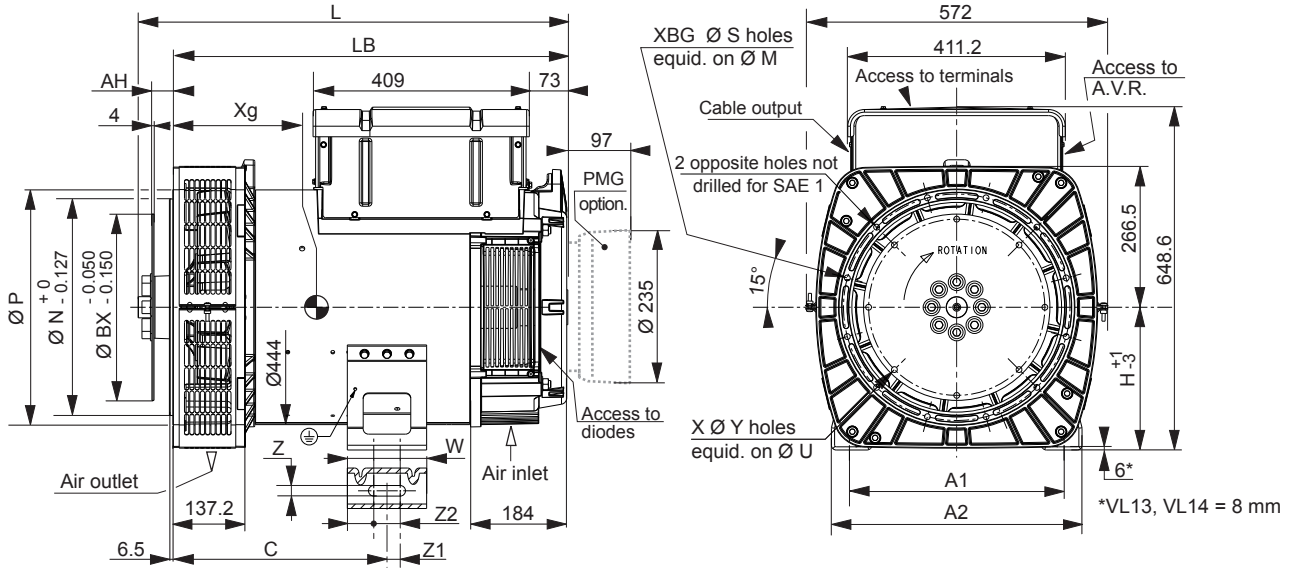

Dimensions (mm) and weight				
Type	L maxi	LB	Xg	Weight (kg)
LSA 44.3 S2	758	677	313	295
LSA 44.3 S3	758	677	313	295
LSA 44.3 S4	758	677	329	332
LSA 44.3 S5	758	677	329	332
LSA 44.3 M6	808	747	353	368
LSA 44.3 M8	808	747	365	398
LSA 44.3 L10	868	787	383	433
LSA 44.3 L12	868	787	383	433
LSA 44.3 VL13	953	872	416	554
LSA 44.3 VL14	953	872	416	554

Shaft height (mm)		
	Standard	Option
H	270	225 <sup>(*)</sup> 280 <sup>(**)</sup>
Feet length		
C	405	332.5 429
A1	406	356 457
A2	474	474 541
Z	20	14.5 20
Z1	25	20 25
Z2	50	40 50
W	150	120 150

Coupling				
Flange	1	2	3	4
14	x	-	-	-
11 1/2	x	x	x	-
10	x	x	x	x
8	-	-	x	x


Flange (mm)					
S.A.E.	P	N	M	S	XBG
4	400	361.95	381	11	12
3	445	409.58	428.62	11	12
2	485	447.68	466.72	11	12
1	560.5 <sup>(*)</sup>	511.18	530.23	12	10

Flex plate (mm)					
S.A.E.	BX	U	X	Y	AH
14	466.72	438.15	8	14	25.4
11 1/2	352.42	333.38	8	11	39.6
10	314.32	295.28	8	11	53.8
8	263.52	244.48	6	11	62

(\*) VL13 and VL14 = 550 mm

(\*) not available for VL13 and VL14  
 (\*\*) available only for VL13 and VL14

Torsional analysis data

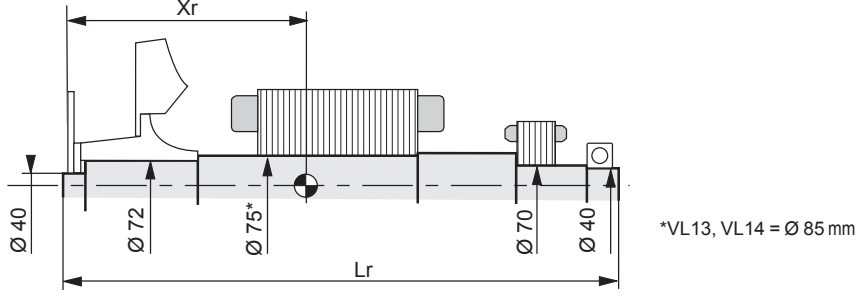

Centre of gravity: Xr (mm), Rotor length: Lr (mm), Weight: M (kg), Moment of inertia: J (kgm <sup>2</sup> ): (4J = MD <sup>2</sup> )																
Flex plate	S.A.E. 8				S.A.E. 10				S.A.E. 11 1/2				S.A.E. 14			
	Xr	Lr	M	J	Xr	Lr	M	J	Xr	Lr	M	J	Xr	Lr	M	J
LSA 44.3 S2	362	729	121	0.855	353	729	121	0.868	322	729	127	0.883	318	729	123	1.007
LSA 44.3 S3	362	729	121	0.855	353	729	121	0.868	322	729	127	0.883	318	729	123	1.007
LSA 44.3 S4	383	729	139	1.013	372	729	139	1.026	359	729	138	1.041	337	729	141	1.165
LSA 44.3 S5	383	729	139	1.013	372	729	139	1.026	359	729	138	1.041	337	729	141	1.165
LSA 44.3 M6	408	799	154	1.129	399	799	154	1.142	386	799	153	1.157	364	799	156	1.281
LSA 44.3 M8	418	799	165	1.236	410	799	165	1.249	397	799	165	1.264	373	799	168	1.388
LSA 44.3 L10	438	839	181	1.371	429	839	181	1.384	417	839	180	1.399	397	839	183	1.523
LSA 44.3 L12	437	839	181	1.381	428	839	181	1.394	416	839	181	1.409	396	839	184	1.533
LSA 44.3 VL13	473	922.4	224	1.739	465	914	224	1.753	451	899	224	1.769	436.5	906	231	1.899
LSA 44.3 VL14	473	922.4	224	1.739	465	914	224	1.753	451	899	224	1.769	436.5	906	231	1.899

NOTE : Dimensions are for information only and may be subject to modifications. Contractual 2D drawings can be downloaded from the Leroy-Somer site, 3D drawing files are available upon request. The torsional analysis of the transmission is imperative. All values are available upon request.





**LEROY-SOMER**<sup>™</sup>

[www.leroy-somer.com/epg](http://www.leroy-somer.com/epg)

[Linkedin.com/company/leroy-somer](https://www.linkedin.com/company/leroy-somer)  
[Twitter.com/Leroy\\_Somer\\_en](https://twitter.com/Leroy_Somer_en)  
[Facebook.com/LeroySomer.Nidec.en](https://www.facebook.com/LeroySomer.Nidec.en)  
[YouTube.com/LeroySomerOfficiel](https://www.youtube.com/LeroySomerOfficiel)



***Nidec***  
**All for dreams**

© Nidec 2018. The information contained in this brochure is for guidance only and does not form part of any contract. The accuracy cannot be guaranteed as Nidec have an ongoing process of development and reserve the right to change the specification of their products without notice.

Moteurs Leroy-Somer SAS. Siège : Bd Marcellin Leroy, CS 10015, 16915 Angoulême Cedex 9, France.  
Capital social : 65 800 512 €, RCS Angoulême 338 567 258.